Evolution Board

with Presidential Trim

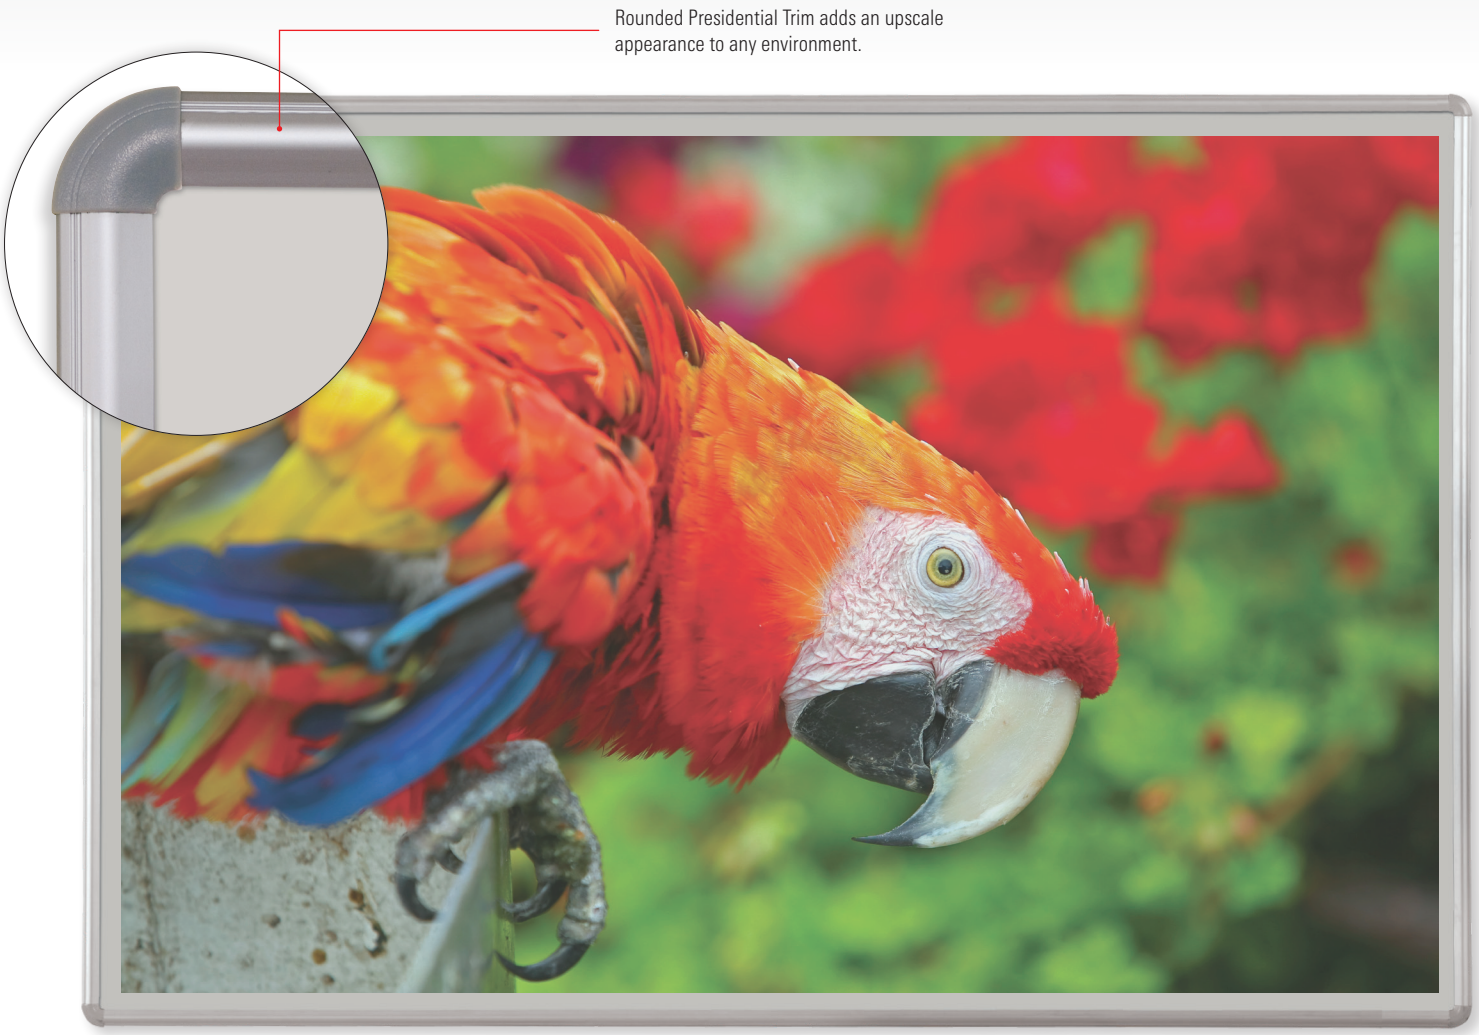

50 Year Guarantee

Best-Rite

www.moorecoinc.com

Evolution Board with Presidential Trim

- The versatile Evolution Board is the ideal choice for a multipurpose audio/visual environment. The specially engineered magnetic porcelain steel surface provides rich and vivid projector images and doubles as a markerboard.
- Low gloss matte gray finish provides exceptional sharpness and clarity, eliminating projection dullness caused by external light sources.
- Surface requires weekly cleaning with a damp cloth for optimum performance. A small amount of marker ghosting may occur.
- Rounded anodized aluminum Presidential Trim includes injection-molded curved corner pieces for an upscale and modern board. Includes matching Magnetic Q-Tray for accessories. Available in silver or black.
- Made in the USA. TAA compliant. 50 year guarantee.

A. Evolution Board - Presidential Trim

Silver	Black	Dimensions	Ship Wt.
404PA-52*	404PA-T1-52*	1 ½'H x 2'W	10 lbs
404PB-52*	404PB-T1-52*	2'H x 3'W	20 lbs
404PC-52**	404PC-T1-52**	3'H x 4'W	36 lbs
404PD-52	404PD-T1-52	4'H x 4'W	69 lbs
404PF-52	404PF-T1-52	4'H x 5'W	84 lbs
404PG-52	404PG-T1-52	4'H x 6'W	94 lbs
404PH-52	404PH-T1-52	4'H x 8'W	120 lbs
404PK-52	404PK-T1-52	4'H x 10'W	146 lbs
404PM-52	404PM-T1-52	4'H x 12'W	194 lbs
404PP-52	404PP-T1-52	4'H x 16'W	243 lbs

Made in the USA.
*Ships UPS **Ships UPS OS1
Due to shipping restrictions, boards listed as 3'H x 4'W actually measure 33 ¾"H x 48"W.

Technical Specifications

- Multipurpose magnetic surface that provides exceptional sharpness and clarity with projected images, and excellent writability for dry erase markers.
- Good color contrast with 60% less glare than standard porcelain steel surfaces.
- Damp erasing is required for optimum performance. Some ghosting may occur.
- A precisely balanced porcelain enamel ground coat is furnace-fused to both sides of 28 gauge (standard) or 24 gauge (custom) steel.
- The first furnace fuses a ground coat of enamel that is heat-softened at approximately 1450° F. The second furnace firing fuses a coat of enamel to the ground coat enamel. Color Fusion ceramic top coat is applied providing the desired surface color.
- A fade resistant waterproof resin glue bonds the porcelain to a moisture-resistant core. Custom sizes are available.

Balt® & Best-Rite® are brand divisions of MooreCo Inc.

2885 Lorraine Ave | Temple, TX 76501
p: 800.749.2258 | f: 800.697.6258

www.moorecoinc.com